Quiet operation ensure a quite spa experience.

DuraJets Powerful. Compact. Proven Reliability.

- Whisper quiet operation
- UL, TUV, CSA, and CE/VDE/GS certified
- 115 volt models available for portable plug and play spas
- Petite volute and compact 48 frame design allow for easy installation in hard to fit areas






DuraJet SpaPump


Dura-Jet® pumps have earned a reputation for consistent quality and long service life. Not surprising, since Dura-Jet pumps are from Sta-Rite®, the internationally recognized leader in the industry. Manufacturers profit from their design flexibility and compact size. Dealers appreciate the ease of replacement. And spa users enjoy their quiet, economical and trouble-free operation.

FEATURES

- Designed and manufactured by Sta-Rite, the pioneering leader renowned for product excellence and reliability
- All seals are carbon ceramic with Viton® elastomers for long-lasting performance, easily enduring prolonged heat and chemical exposure
- Available in 230V or 115V 60Hz motors for North America and 230V 50Hz TEFC motors for Europe
- Unique design impeller provides higher efficiency flow with a smaller horsepower motor than other pumps in the same class; high flow rates can exceed 210 gallons per minute
- Multi-directional volute mountings and a 3 position drain plug for complete flexibility of configuration
- Choose single or two-speed motors from 1 to 3 HP; with two-speed models, sanitization and heating can occur while maintaining lower running costs

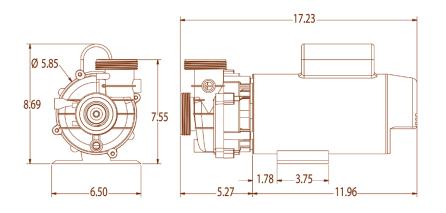

60Hz PERFORMANCE CURVE North America Model



DUR0209

©2009 Balboa Water Group. All rights reserved. Your **Single Source** Solution. **1382 Bell Avenue** | **Tustin, CA 92780** | p 714.384.0382 | www.balboawatergroup.com



OPTIONS


- True rated 1, 1.5, 2, 2.5, and 3 HP models
- 115 volt options in 1 and 1.5 HP; remaining motors 230V 60Hz for North America; 230V 50Hz TEFC motors for Europe
- 48 or 56 Frame Size
- Class F insulation
- Single or 2-speed models
- All spa pack or plug and play connection leads available

SPECIFICATIONS

- Center suction / radial side discharge orientation
- Suction Port: 2"
- Discharge Port: 2"
- Mechanical Seal: Carbon ceramic with Viton elastomers

Plumbing configuration affects pump performance. Engineering consultation is available to find the best pump for all your spa needs.

50Hz PERFORMANCE CURVE International Model



BALBOA.