

TheUltima

Powerful. Compact. Proven Reliability.

- UL and CSA certified
- Single or Two Speed Models
- 115 volt options for portable plug and play spa models
- 115 volt options in 1 and 1.5 HP; remaining motors 230V 60Hz
- Multi-direction volute mounting and options deliver the greatest range of plumbing configurations






TheUltimaSpaPump

Ultima pumps provide long life, excellent performance and configuration flexibility all in a cost-effective package. With flow rates that can exceed 230 gallons per minute, Ultima pumps are ideal for value-priced applications in any size spa.


FEATURES

- All seals are carbon ceramic with Viton® elastomers for long-lasting performance, easily enduring prolonged heat and chemical exposure.
- Available in a compact 48 frame design motor or a cool running 56 frame motor.
- Choose single or two-speed motors from 1 to 2 HP. With two-speed models, sanitation and heating can occur while maintaining lower running costs. Low cost motor combination option available for economical spa systems.

With lower price points, ease of installation, high flow rates, and energy efficient packages, Ultima pumps offer the options you need and spa owners truly appreciate. Contact your BWG representative today for additional information.

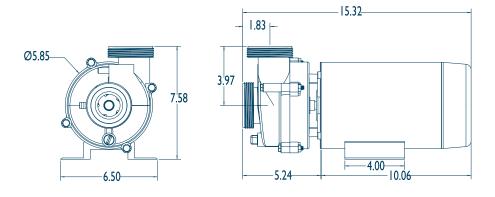

60Hz PERFORMANCE CURVE USA Model

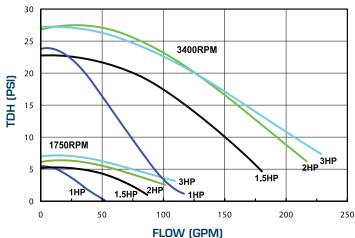



OPTIONS

- True rated 1, 1.5, and 2HP models
- 115 volt options in 1 and 1.5 HP; remaining motors 230V 60Hz
- 48 or 56 Frame Size
- Class F insulation
- Single or 2-speed models

SPECIFICATIONS

- Center suction/radial side discharge orientation or center suction / center line top discharge
- Suction Port: 1.5" or 2"
- Discharge Port: 1.5" or 2"
- Mechanical Seal: Carbon ceramic with Viton® elastomers

Plumbing configuration affects pump performance. Engineering consultation is available to find the best pump for all your bath needs.

